NORTHGATE LOGISTICS HUB

GROUND FLOOR PLAN

KEY
DOOR / SWING
WINDOW
WALL

RACK A
RACK B
RACK C

WAREHOUSE / ASSEMBLY
484 m²

DOCK 02
DOCK LEVELLER
DOCK 01
DOCK LEVELLER

STAGING

FORKLIFT AISLE

PACKING / ASSEMBLY
GOODS OUT

10.00 m KNOWN DIMENSION — USE FOR CALIBRATION

DRIVE-IN GATE 4.5 × 4.5

WORKSHOP / MAINTENANCE
120 m²

CRANE 5 t
WELDING

WORKSHOP DOOR 3.0 × 3.6

OPEN OFFICE
35 m²

MEETING
12.5 m²

WC / SHOWER
12.5 m²

CORRIDOR
24 m²

RECEPTION
25 m²

MEETING
20 m²


BREAKROOM
15 m²

MAIN ENTRANCE

10.00
12.00
22.00
22.00
12.00
34.00

NORTHGATE LOGISTICS HUB		SHEET
GROUND FLOOR PLAN		A-101
SCALE 1:100	NOT FOR CONSTRUCTION	REV P01
DATE 2026-10-26	DIMENSIONS IN METRES	CHECKED
		A3 / 420 × 297

MEZZANINE FLOOR · 120 m²

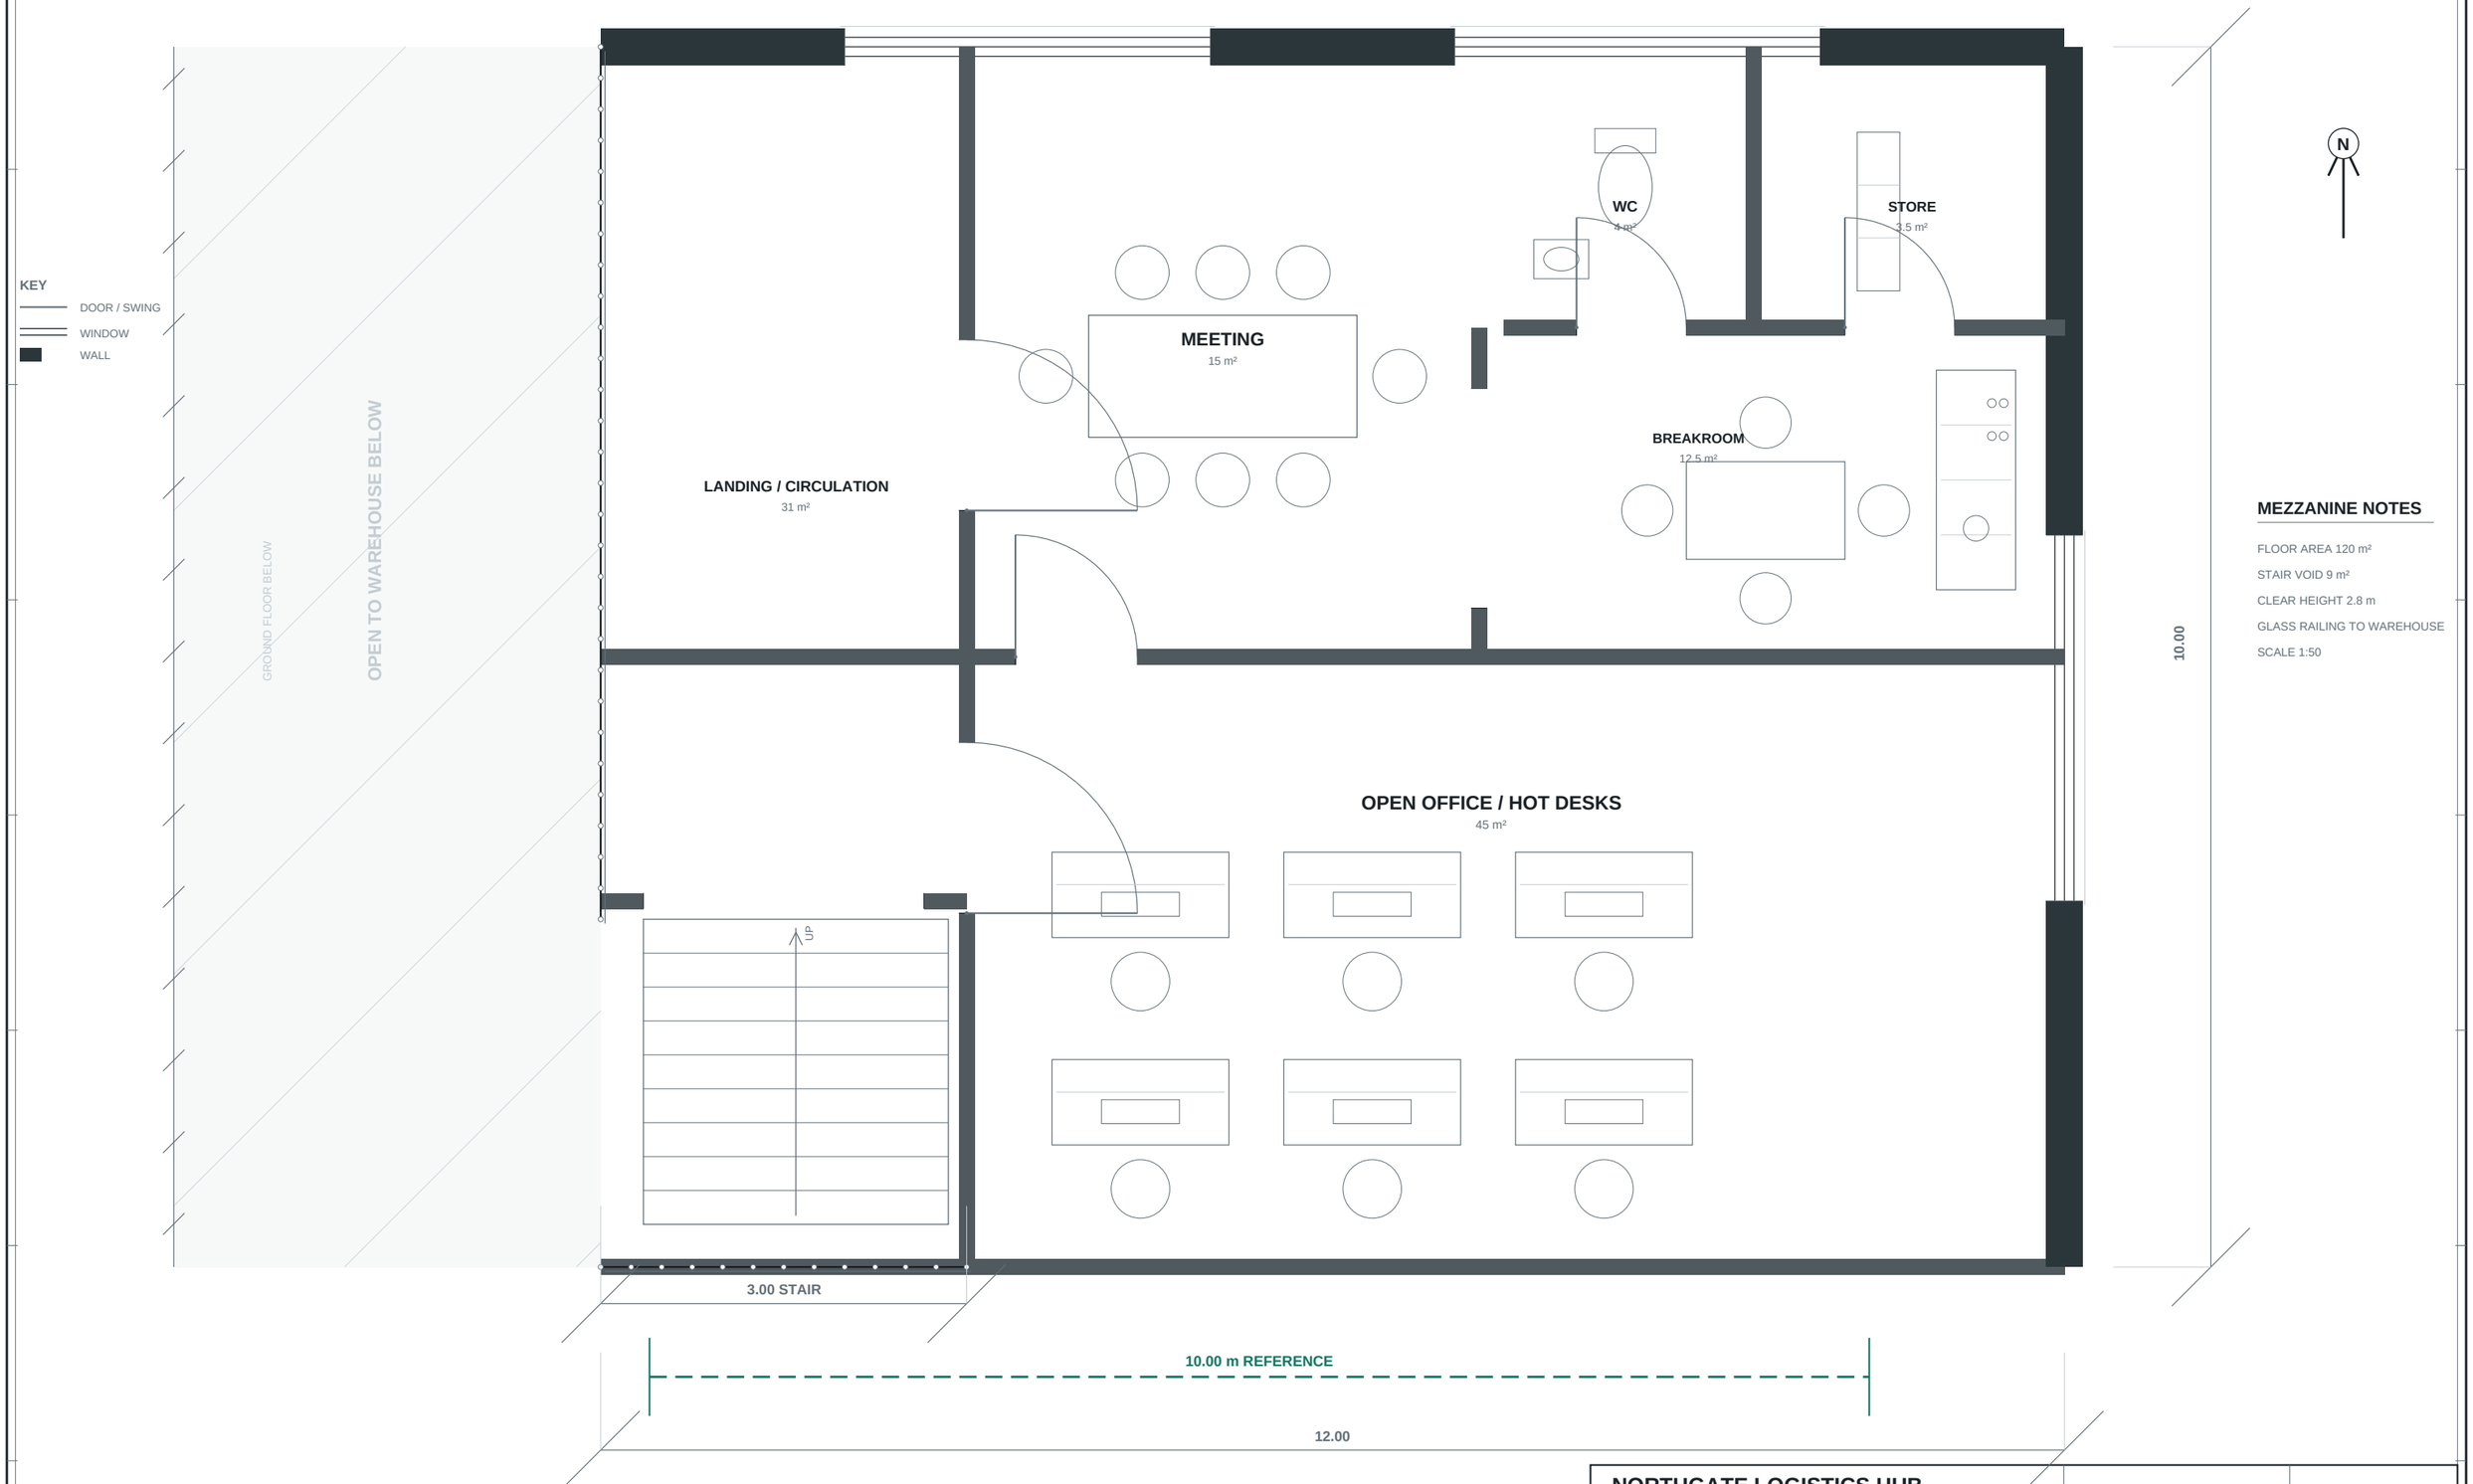


MEZZANINE NOTES

- FLOOR AREA 120 m²
- STAIR VOID 9 m²
- CLEAR HEIGHT 2.8 m
- GLASS RAILING TO WAREHOUSE
- SCALE 1:50

NORTHGATE LOGISTICS HUB		SHEET A-102
MEZZANINE PLAN		
SCALE 1:50 · DATE 2026-10-26	NOT FOR CONSTRUCTION · DIMENSIONS IN METRES	REV P01 · CHECKED · A3 / 420 × 297

LOCATION KEY · N.T.S.



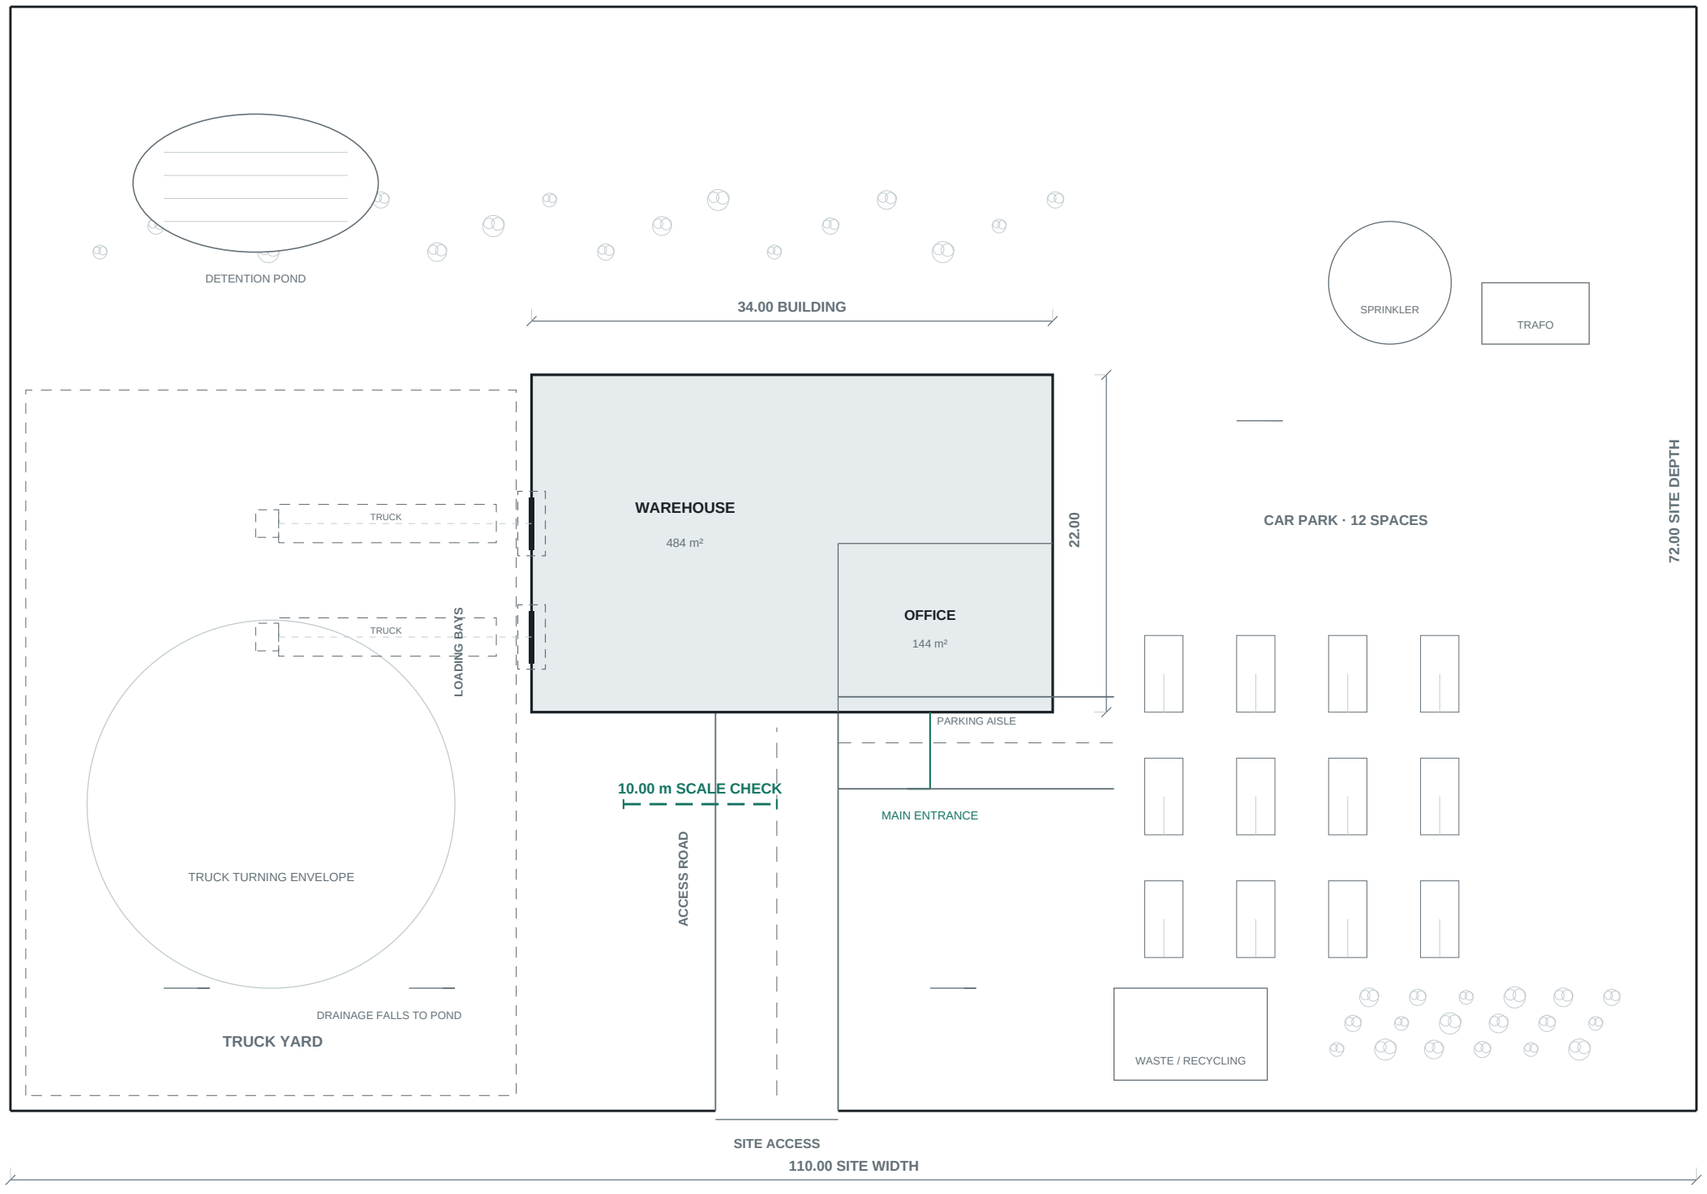

SCALE 1:400

0 1 2 5

SITE NOTES

1. SITE AREA 7,920 m². BUILDING FOOTPRINT 748 m².
2. ACCESS ROAD 8.0 m WIDE, DESIGNED FOR 16.5 m ARTICULATED VEHICLES.
3. TRUCK YARD AND TURNING ENVELOPE KEPT CLEAR AT ALL TIMES.
4. ATTENUATION POND AND DRAINAGE TO BE VERIFIED BY CIVIL ENGINEER.
5. LANDSCAPING AND FENCING BY SITE CONTRACTOR.

AREA SCHEDULE

SITE AREA	**7,920 m²**
BUILDING FOOTPRINT	**748 m²**
WAREHOUSE	**484 m²**
OFFICE	**144 m²**
WORKSHOP	**120 m²**
CAR PARK	**12 SPACES**
LOADING BAYS	**2**

NORTHGATE LOGISTICS HUB

SITE PLAN

SCALE 1:400
DATE 2026-10-26

NOT FOR CONSTRUCTION
DIMENSIONS IN METRES

REV P01
CHECKED

SHEET
A-103
A3 / 420 × 297